


SPECIFICATIONS

- Chrome-plated steel cap - vents underneath.
- Filtration 40 microns standard, 10 microns optional.
- Air Flows To 25 CPM (750 LPM)
- Metal Strainer Standard
- Hardware includes gaskets and 10-32 screws.



MODEL FBA

DIMENSIONS

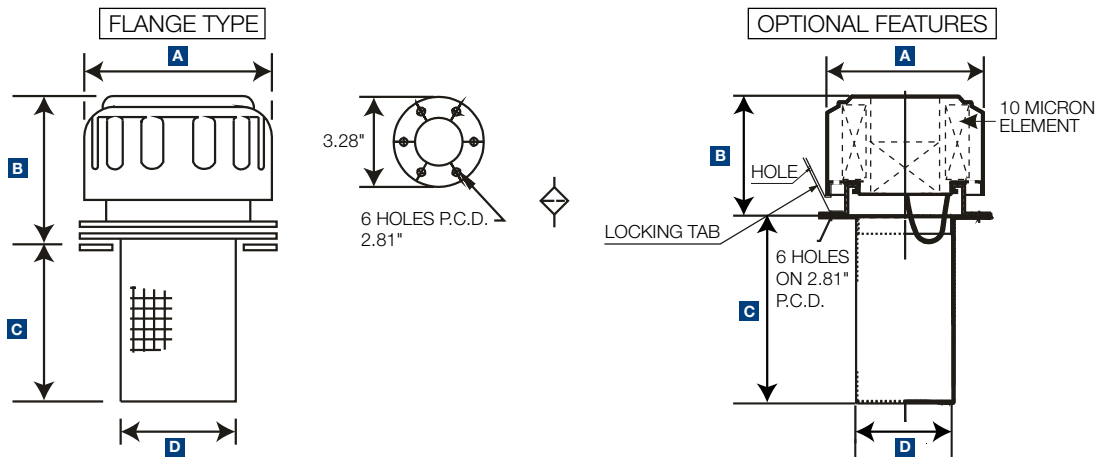

Model	Displacement (LPM)	Rating (microns)	A (in)	B (in)	C (in)	D (in)	Wt (lbs)
FBA-80 B40	720	40	3.03	2.44	3.58	1.97	0.55
FBA-80 B10	400	10	3.03	2.44	3.58	1.97	0.55

ORDERING INFORMATION

FBA	-	80	-	B40	-	B0	-	DS4	-	01
Metal Filler Breather series				Filtration (microns)		Strainer		Dipstick Option		Locking Tab
		B40 - 40 μ std		B0 - 3.58"		Blank - No Dipstick		01 - Without tab		
		B10 - 10 μ nom		B002 - 6"		DS4 - 4"		L1 - With tab		
				B003 - 8"		DS6 - 6"				
						DS8 - 8"				